


AURORA ACCESSORIES
WATTS HOT WATER EXTENDER
TEMPERING VALVES

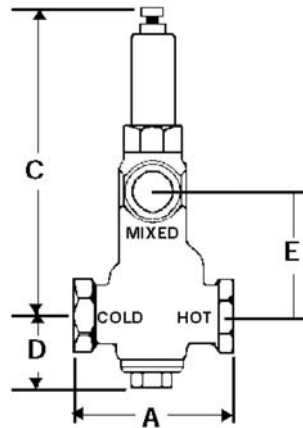

MODEL	SIZE	A	B	C	D	WT
N170-M2	3/4"	4.13	5.63	2.00	3.50	4.1
N170L-M2		(105)	(143)	(50)	(90)	(1.9)
N170-M2-HT						
N170-M2	1"	4.50	5.63	2.00	3.50	4.4
N170L-M2		(114)	(143)	(50)	(90)	(2.0)
N170-M2-HT						
N170-M2	1-1/4"	6.00	6.00	2.00	3.44	8
N170L-M2		(152)	(152)	(50)	(88)	(3.6)
N170-M2-HT						
N170-M2	1-1/2"	6.00	6.00	2.13	3.44	8
N170L-M2		(152)	(152)	(54)	(88)	(3.6)
N170-M2-HT						
N170-M2	2"	6.38	6.00	2.13	3.44	8.75
N170L-M2		(162)	(152)	(54)	(88)	(4.0)
N170-M2-HT						

Used on larger hot water supply systems for mixing hot and cold water to extend the hot water supply. Bronze body with stainless steel disk (HT models have Teflon disk) and copper thermostat.

Minimum flow requirement to maintain temperature: 8-9 gpm (30-34 lpm)

Model N170-M2 & N170-M2-HT Adjustable range: 130-180 deg F (55-82 deg C)

Model N170L-M2 Adjustable range: 100-130 deg F (38-55 deg C)

NOTES:

1. All dimensions in inches (mm), lbs (kg)
2. Dimensions may vary plus minus 1/8 (3)
3. Maximum working pressure: 150 psi (10 Bar)
4. Maximum working temperature 210 deg F (99 deg C)
5. For additional information visit www.wattsreg.com.