

Series Name: 5TMH-250


Pump Size: 5TMH-250, Pump Dia. with cable guard 5.625" (143 mm), 4" NPT discharge

Department of Energy Requirements	
PEI _{CL}	0.92
Model	5TMH-250

Available Configurations	
5TMH-250	
Imp. Dia.	4.22 in/107 mm

Curve Conditions	
Nominal RPM	3475 (60 Hz)
Maximum Working Pressure	635 PSI (43.8 BAR)
Based on Fresh Water	68°F/20°C

Curves represent standard catalog staging

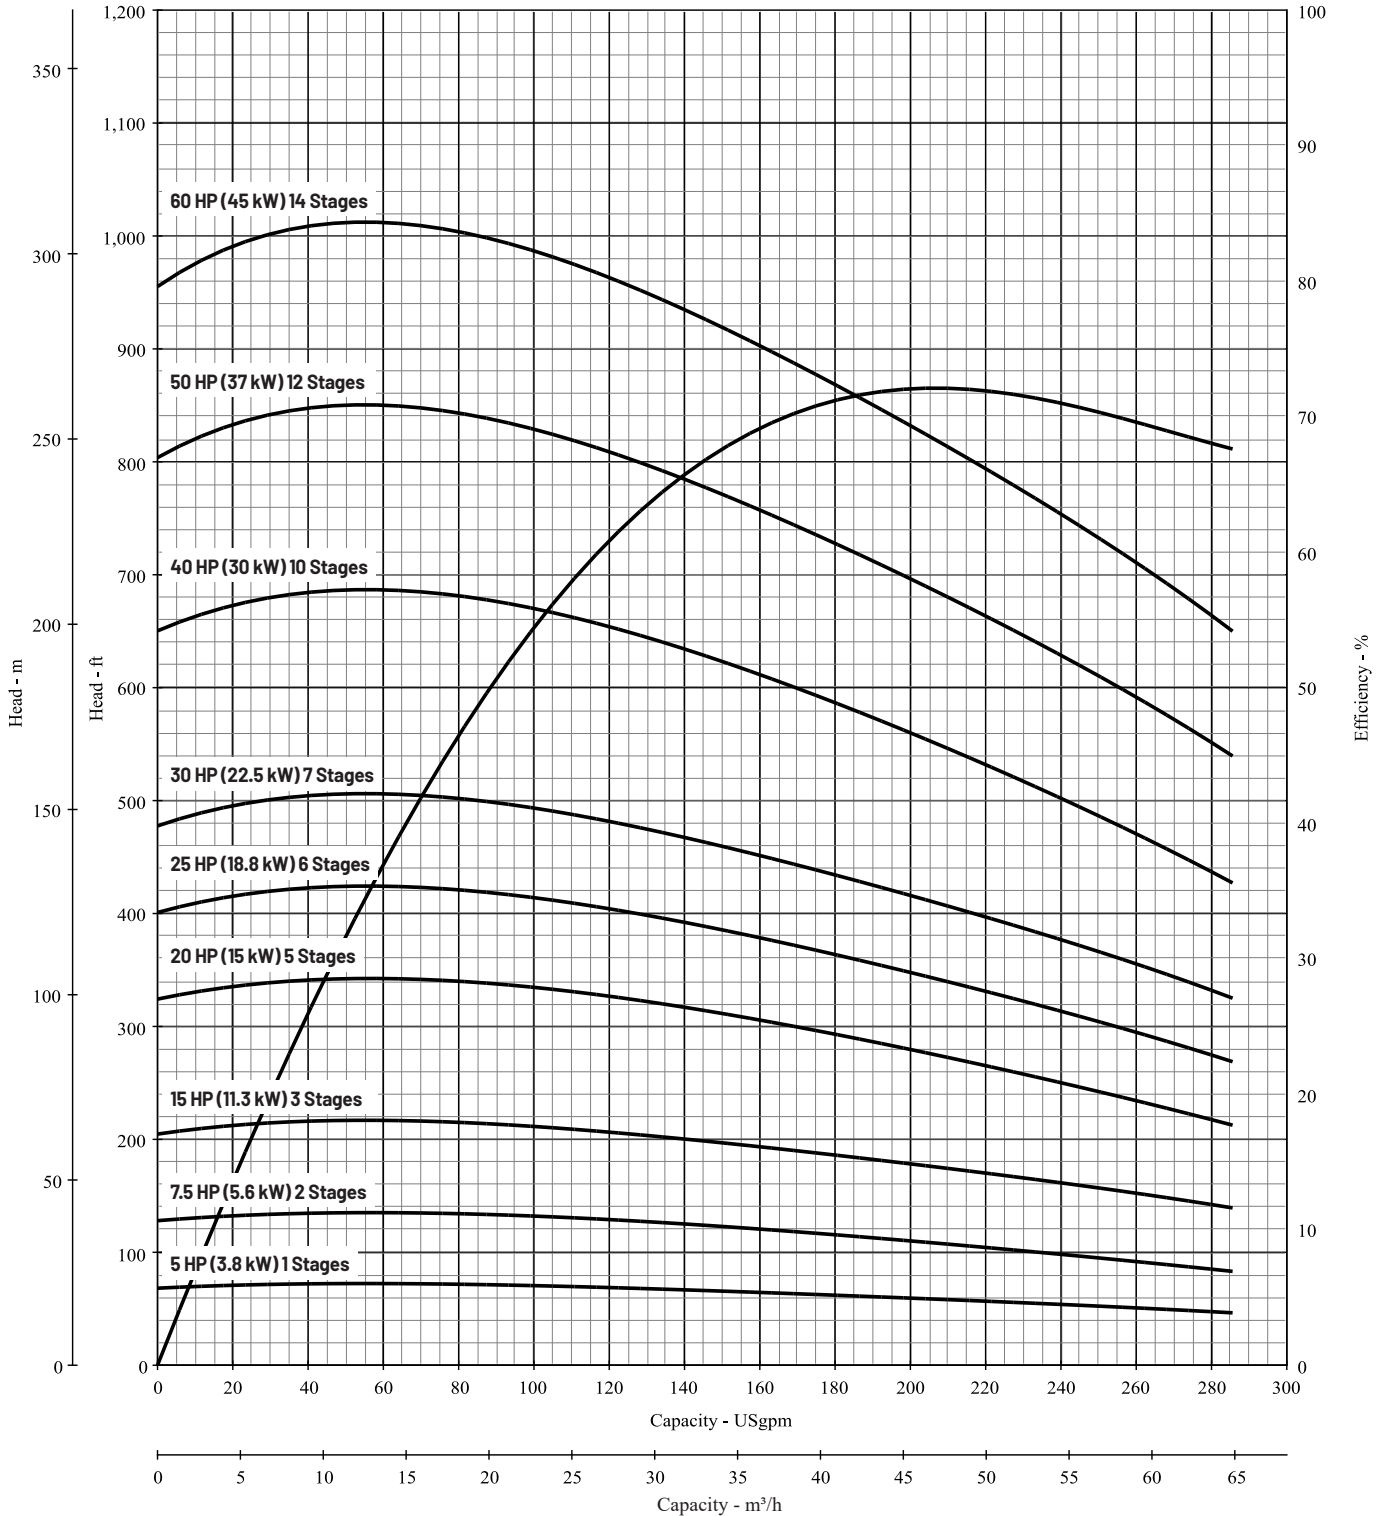

Series Name: 5TMH-250



Pump Size: 5TMH-250, Pump Dia. with cable guard 5.625" (143 mm), 4" NPT discharge

Department of Energy Requirements	
PE _{CL}	0.92
Model	5TMH-250

Available Configurations	
5TMH-250	
Imp. Dia.	4.22 in/107 mm

Curve Conditions	
Nominal RPM	3475 (60 Hz)
Maximum Working Pressure	635 PSI (43.8 BAR)
Based on Fresh Water	68°F/20°C

Curves represent standard catalog staging

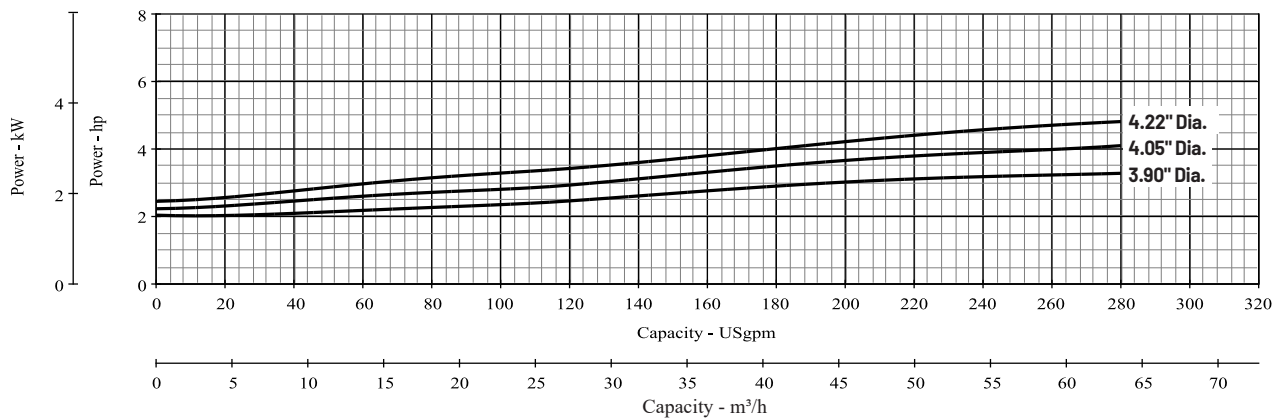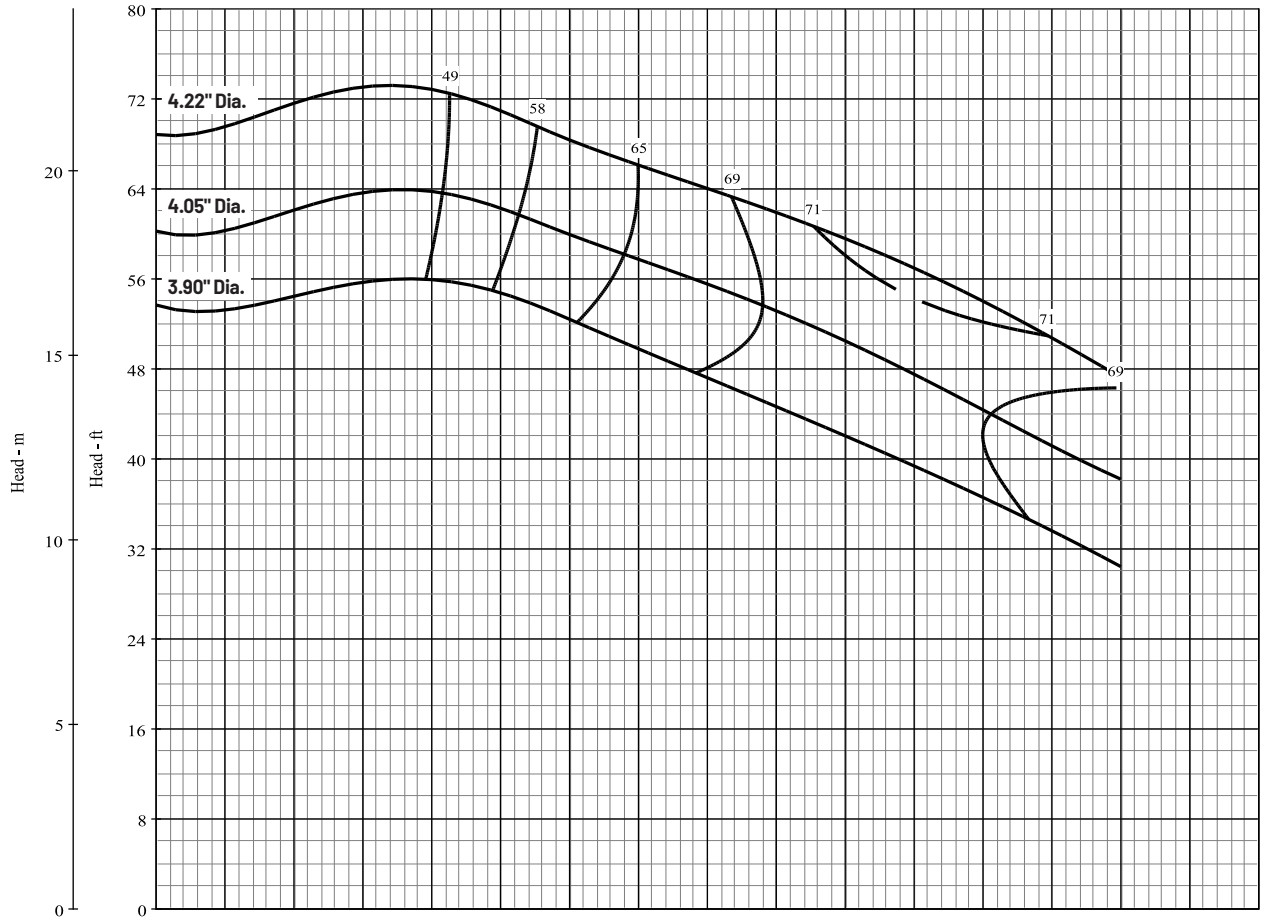

This product as sold in U.S. is regulated by 10 CFR Parts 429 and 431.

293 Wright Street | Delavan | WI 53115 | pentair.com/pentair-berkeley

*For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/en/registrations.html. Pentair trademarks and logos are owned by Pentair PLC, or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.