

PENTAIR BERKELEY

Series Name: B6J_BM

Department of Energy Requirements		
PEIcl 0.97		
	B6JBM	
Model		
Imp. Dia. (in.)	13.50	

Available Cor	nfigurations	Curve Conditions	
CCMD	B6JPBM	Nominal RPM	1160
Frame	B6JRMBM	Maximum Working Pressure	266 PSI (18 BAR)
SAE	B6JQBM	Based on Fresh Water @ F	68 (20 C)
			•

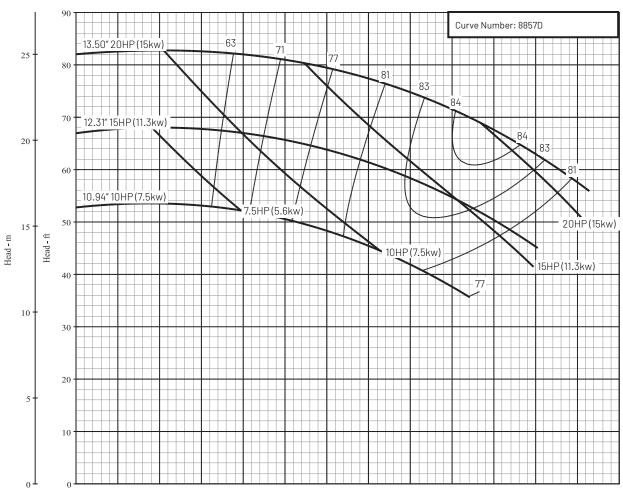

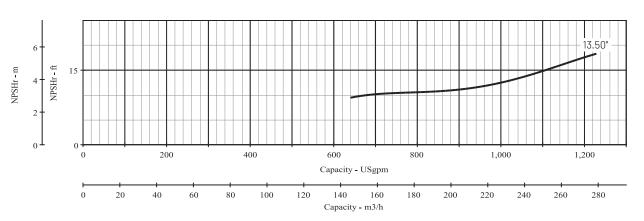


PENTAIR BERKELEY


Series Name: B6J_BM

Department of Energy Requirements			
PElcL	PEIc. 0.97		
	B6JBM		
Model			
Imp. Dia. (in.)	13.50		

Available Configurations		
CCMD	B6JPBM-CW	Non
Frame	B6JRMBM_CCW	Maximum V
SAE	B6JQBM	Based on I

Curve Conditions			
Nominal RPM	1750		
Maximum Working Pressure	266 PSI (18 BAR)		
Based on Fresh Water @ F	68 (20 C)		

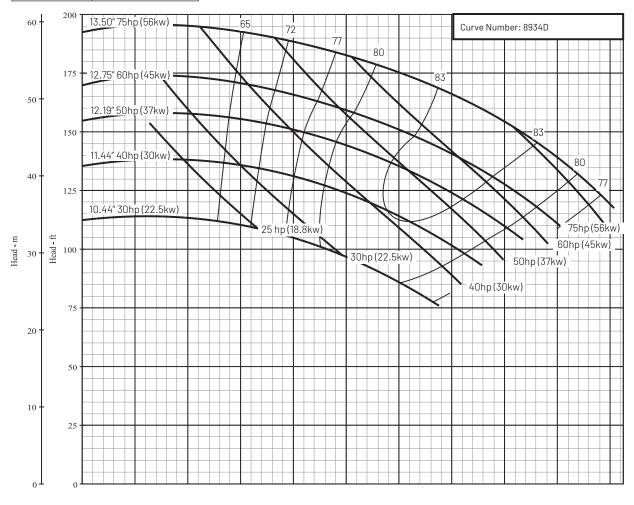

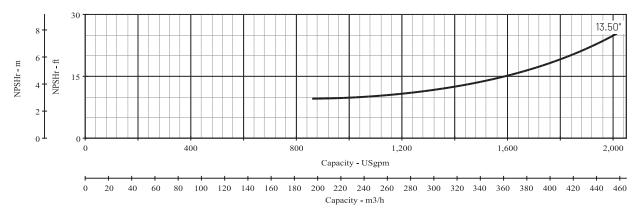


Series Name: B6J_BM


Department of Energy Requirements			
PEIcl	PEIcl 0.97		
	B6JBM		
Model			
Imp. Dia. (in.)	13.50		

Pump	Size:	6 x 8	3 x 1	3 BM
------	-------	-------	-------	------

Available Configurations		
CCMD	B6JPBM-CW	
Frame	B6JRMBM_CCW	
SAE	B6JQBM	

Curve Conditions		
Nominal RPM	VARIOUS	
Maximum Working Pressure	266 PSI (18 BAR)	
Based on Fresh Water @ F	68 (20 C)	

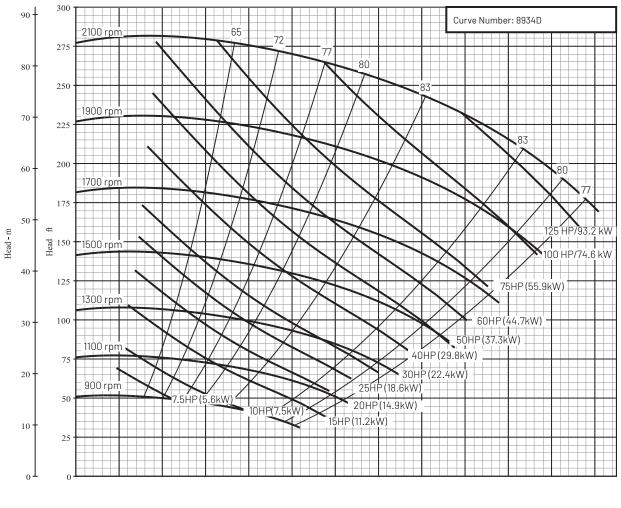

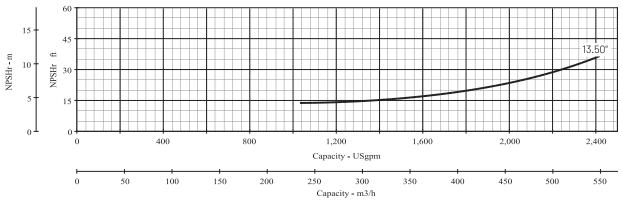

This product as sold in U.S. is regulated by 10 CFR Parts 429 and 431.

293 Wright Street | Delavan | WI 53115 | www.BerkeleyPumps.com

For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/en/registrations.html. Pentair trademarks and logos are owned by Pentair PLC. or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer. BKI3054D0E (12/20/20) © 2020 Pentair. All Rights Reserved.