

# H-54

## DRINKING WATER SYSTEM



### FEATURES • BENEFITS

- ◆ Commercial-grade water filtration for the home
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means
- ◆ Exclusive Micro-Pure® filtering material coats the pleated surface inside the cartridge
- ◆ The Pentair® Everpure® signature metal canister delivers commercial-grade durability
- ◆ Retains vital minerals found naturally in water to ensure the delicious taste of your water
- ◆ Built-in water shut-off allows for easier cartridge changes
- ◆ Food-grade polymer lining prevents water from contacting the metal

### INSTALLATION TIPS

- ◆ Install vertically with cartridge hanging down.
- ◆ Use the minimum length of tubing possible.
- ◆ A separate drinking water faucet is required
- ◆ Flush new cartridge at full flow for three minutes to purge air.
- ◆ Space required: 5W x 15H x 5D in (13W x 38H x 13D cm) including 2½ inches of clear space under unit for cartridge change.


### OPERATION TIPS

- ◆ Replace cartridge when capacity is reached, or when flow becomes too slow, but at least annually.
- ◆ Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

### INCLUDES

- ◆ Side faucet
- ◆ Installation and operation manual

# EVERPURE H-54 DRINKING WATER SYSTEM

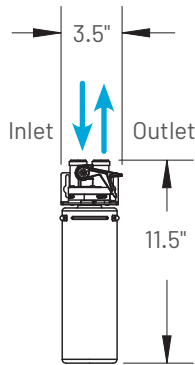

## SPECIFICATIONS

- ◆ **System**  
(Model / Part No.)  
H-54 / EV925267
  - ◆ **Flow Rate**  
controlled at 0.5 gpm (1.9 Lpm)
  - ◆ **Inlet Size**  
3/8" QC
  - ◆ **System Dimensions**  
3.5" W x 11.5" H x 4.25" D  
(8.9W x 29.21H x 10.8D cm)
  - ◆ **System Weight**  
3.5 lbs (1.58 kg)
  - ◆ **Contaminant Reduction**  
Chlorine Taste & Odor, Lead, Microplastics, Cysts: NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means.
  - ◆ **Approximate Filter Life\***  
Up to 1 Year
  - ◆ **Capacity**  
750 Gallons (2,839 Liters)
  - ◆ **Certifications**  
NSF/ANSI Standard 42, 53, 401
  - ◆ **Pressure**  
10-125 psi (0.7-8.6 bar) non-shock
  - ◆ **Temperature**  
35-100° F (2-38° C)  
cold water use only
  - ◆ **Replacement Cartridges**  
(Model / Part No.)  
H-54 / EV925268
- \* Filter life dependent on gallon usage and overall incoming water quality.

**MADE IN THE**  
**USA**  
OF FOREIGN & DOMESTIC PARTS



The model H-54 is Tested and Certified by NSF International against NSF/ANSI Standards 42, 53, and 401 for the reduction of the claims specified on the Performance Data Sheet.

EPA Est. 002623-IL-002



**PENTAIR**  
WATER SOLUTIONS

Pentair Residential Filtration, LLC

13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | [tech-support@pentair.com](mailto:tech-support@pentair.com) | [pentair.com](http://pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2025 Pentair. All Rights Reserved.

310909 MR25