



**Thermoplastic**

# Easy Sump™

**High-Output Performance**



Energy Efficient Design  
Diseño Eficiente de la Energía  
Conception rationnelle de l'énergie

**Pre-Plumbed for easy installation**

Three easy steps saves time and money

**Versatile design**

Replaces pedestal or submersible pump

**Thermoplastic construction**

Resists corrosion

**Zinc motor housing**

Dissipates heat quickly and extends motor life

**Stainless steel fasteners and hardware**

Superior quality

**Smooth Flow Hydraulics™**

Deliver high performance for demanding applications

**Vertical float switch**

Operates in 10" basins or larger




**1/2 HP 4200 GPH FPZS50RP**

PERFORMANCE (GPH)							FLOAT SWITCH		SOLIDS HANDLING
	DISCHARGE HEIGHT ABOVE PUMPING LEVEL	0'	5'	10'	15'	20'	MAX. LIFT	ON	
<b>FPZS50RP</b>	4,200	3,660	3,000	2,160	960	22'	7.5"	3"	3/16"

MODEL	WARRANTY	UPC	CARTON DIMENSIONS	PALLET QTY.	WEIGHT
<b>FPZS50RP</b>	1 YEAR	022315377332	8" x 6" x 33.25"	35	12.35 LBS

Includes: 1 1/2" NPT discharge, 8' grounded power cord, piggyback-style switch for automatic or manual operation, check valve, 1-1/2" PVC pipe

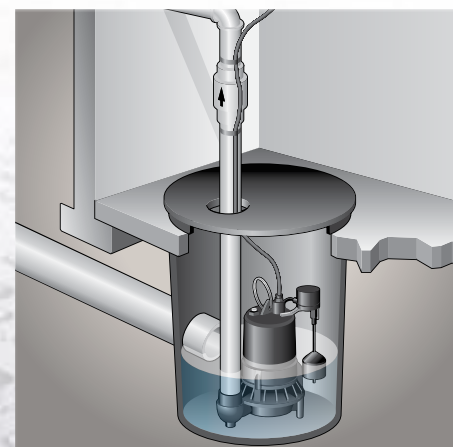

Operates in 10" basins and larger.

Requires dedicated 15 amp breaker for proper installation

293 Wright Street, Delavan, WI 53115  
For Questions or Installation Instructions:  
[www.flotecwater.com](http://www.flotecwater.com) 1-800-365-6832