




## AUTOMATIC SUBMERSIBLE SEWAGE PUMP

### MODEL 3963 1/2 HP

- Capable of handling 2" solids – ideal for basement installation, pumping below-grade toilets, laundry facilities and general dewatering
- Rugged cast-iron construction maximizes pump life
- Heavy-duty motor with overload protection provides safe operation
- Maximum pumping capacity to 9000 gallons per hour
- Includes 10' power cord
- 2" NPT cast iron discharge
- Easy installation, requires minimum 18" diameter sewage basin

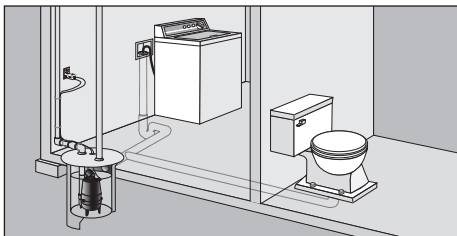

#### PERFORMANCE

Model	HP	Warranty	Switch Type	Min. Sump Diameter	Discharge Height Above Pumping Level (GPH)				Max. Lift
					0	5'	10'	15'	
3963	1/2	3-year	Tethered	18"	9000	7320	5400	2700	18'

#### ORDERING INFORMATION

Model	UPC	Carton (L x W x H)	Cube	Pallet Qty.	Weight
3963	0 22315 30828 2	10.563" x 9.188" x 17.063"	.958	36	35.85 lbs.