

# STA-RITE® DMC Series Multi-Stage Centrifugal Pump



The DMC Multi-Stage Centrifugal Pump offers heads to 175 feet and capacities to 50 GPM. Designed for the professional with heavy-duty cast iron pump case and seal plates and diffuser with Noryl® impellers for years of proven service. Available in 2 HP model.

## APPLICATIONS

- Residential Lawn Sprinkling
- Turf Irrigation
- Heat Pumps
- Water Transfer

## ORDERING INFORMATION

Catalog Number	HP	Suction	Pump/Motor Unit		Shallow Well Adapter	
			Discharge	Length	Approx. Wt. Lbs.	Approx. Wt. Lbs.
SINGLE PHASE - 115/230V*						
<b>DMC-2-200</b>	2*	1-1/4"	1"	20-7/8"	63	3
DMC SWITCH KIT - SK75						
Catalog Number				Approx. Wt. Lbs.		
66632				2		

\*2 HP available 230V only.

## SPECIFICATIONS

**Pump Case** - Cast iron

**Diffuser** - Reinforced polypropylene

**Impeller** - Noryl®

**Mechanical Shaft Seal, Type 6** - Buna-N, Carbon, Ceramic, 18-8 stainless steel

**Mounting Base** - Steel

## FEATURES

**Rugged Construction** - Heavy-duty cast iron pump case and seal-plate  
**Drain Port** - Provided for easy winterization


**Easy Serviceability** - Normal wearing parts are easily accessible for service and replacement, without disturbing piping

**Heavy-Duty Motors** - Designed for continuous operation.

Noryl® is a registered trademark of General Electric Co.  
 All other brand or product names are trademarks or registered marks of Pentair Ltd.

# STA-RITE® DMC Series Multi-Stage Centrifugal Pump

## PUMP PERFORMANCE

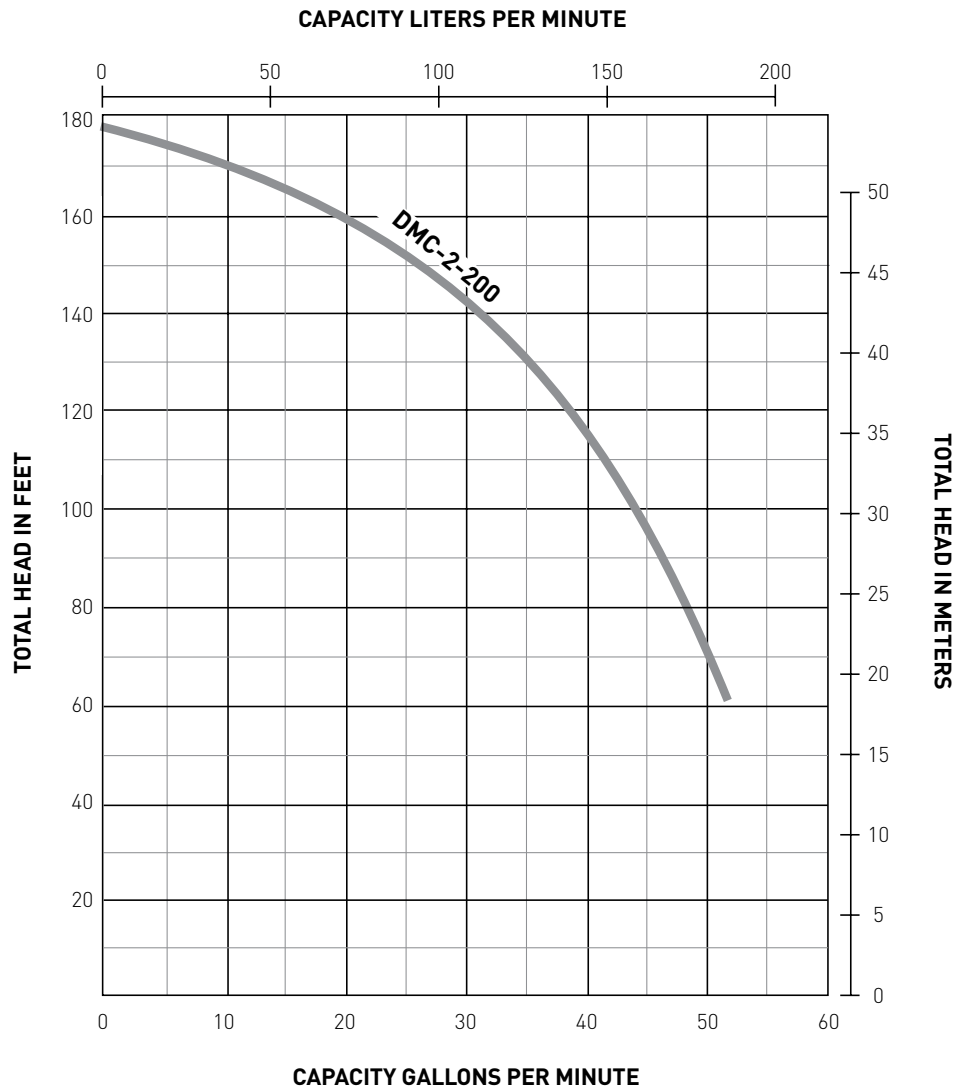

Catalog Number	HP	Discharge Pressure PSI	Depth to Water in Feet				
			5'	10'	15'	20'	25'
DMC-2-200	2	30	49	48	47	46	45
		40	44	43	42	40	39
		50	38	36	35	33	31
		60	30	27	24	21	15

Pumping capacities in gallons per minute at indicated discharge pressures in pounds per square inch.

